



## **Hena** 100

Single-stage, oil-sealed rotary vane pump with a pumping speed up to 120 m<sup>3</sup>/h







Similar Image

## Hena 100, 3-phase motor, 190-208/380-415 V, 50 Hz; 220-230/440-460 V, 60 Hz

- Powerful rotary vane pump with a pumping speed up to 120 m³/h
- 3-phase motor for 190-208/380-415 V, 50 Hz or 220-230/440-460 V, 60 Hz supply voltages
- Integrated gas ballast and high vacuum safety valve
- For all low and medium vacuum applications

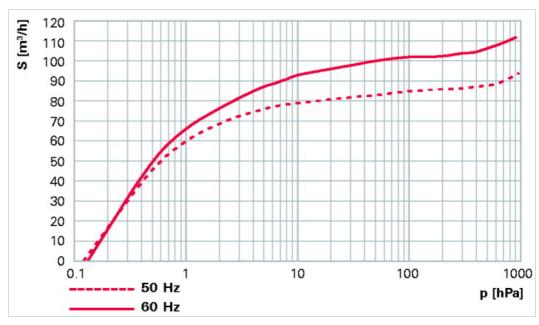

## **Dimensions**

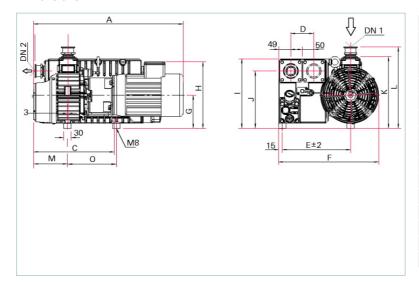

Α	699 mm
В	131 mm
С	387 mm
D	93 mm
DN 1	DN 40 ISO-KF
DN 2	DN 40 ISO-KF
E	277 mm
F	406 mm
G	134 mm
Н	294 mm
l	280 mm
J	231 mm
K	290 mm
L	329 mm
M	137 mm
0	226 mm

Technical Data	Hena 100, 3-phase motor, 190-208/380-415 V, 50 Hz; 220-230/440-460 V, 60 Hz
Cooling method, standard	Air
Emission sound pressure level without gas ballast at 50 Hz	<= 65 dB (A)
Emission sound pressure level without gas ballast at 60 Hz	<= 68 dB (A)
Exhaust pressure, max.	1,500 hPa   1,125 Torr   1,500 mbar
Exhaust pressure, min.	1,000 hPa   750 Torr   1,000 mbar
Flange (in)	DN 40 ISO-KF, female thread G 5/4" pump hou sing
Flange (out)	DN 40 ISO-KF, female thread G 5/4" pump hou sing
Mains requirement: voltage 50 Hz	190-208/380-415 V
Mains requirement: voltage 60 Hz	220-230/440-460 V
Motor protection	3TF
Operating fluid	P3
Operating fluid filling	21
Protection category	IP 55
Pumping speed at 50 Hz	100 m <sup>3</sup> /h
Pumping speed at 60 Hz	120 m <sup>3</sup> /h
Rated power 50 Hz	2.7 kW
Rated power 60 Hz	3.4 kW
Rotation speed at 50 Hz	1500 min <sup>-1</sup>
Rotation speed at 60 Hz	1800 min <sup>-1</sup>
Ultimate pressure with gas ballast	1.5 hPa   1.12 Torr   1.5 mbar
Ultimate pressure without gas ballast	0.3 hPa   0.23 Torr   0.3 mbar
Weight	77 kg   169.75 lb

Ultimate pressure according to PNEUROP

Order number	
Hena 100	PK D02 350

Accessories		
Accessories		
FAK 040, activated carbon filter	PK Z30 008	
KAS 40, condensate separator for pumping speeds up to 100 m <sup>3</sup> /h	PK Z10 008	
Accessories HenaLine		
SAS 40, DN 40 ISO-KF, polyester filter	PK Z60 510	
Accessories UnoLine Plus		
PTC-resistor tripping device	P 4768 051 FQ	
Consumables		
P3, mineral oil, 1 l	PK 001 106 -T	
P3, mineral oil, 5 l	PK 001 107 -T	
P3, mineral oil, 20 l	PK 001 108 -T	



Vacuum solutions from a single source

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

Complete range of products

From a single component to complex systems: We are the only supplier of vacuum technology that provides a complete product portfolio.

Competence in theory and practice

Benefit from our know-how and our portfolio of training opportunities! We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a perfect vacuum solution? Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de
www.pfeiffer-vacuum.com